

Asymptotically Optimal Energy-Aware Routing for Multihop Wireless Networks With Renewable Energy Sources

Longbi Lin, *Student Member, IEEE*, Ness B. Shroff, *Senior Member, IEEE*, and R. Srikant, *Fellow, IEEE*

Abstract—In this paper, we develop a model to characterize the performance of multihop radio networks in the presence of energy constraints and design routing algorithms to optimally utilize the available energy. The energy model allows us to consider different types of energy sources in heterogeneous environments. The proposed algorithm is shown to achieve a competitive ratio (i.e., the ratio of the performance of any offline algorithm that has knowledge of all past and future packet arrivals to the performance of our online algorithm) that is asymptotically optimal with respect to the number of nodes in the network. The algorithm assumes no statistical information on packet arrivals and can easily be incorporated into existing routing schemes (e.g., proactive or on-demand methodologies) in a distributed fashion. Simulation results confirm that the algorithm performs very well in terms of maximizing the throughput of an energy-constrained network. Further, a new threshold-based scheme is proposed to reduce the routing overhead while incurring only minimum performance degradation.

Index Terms—Competitive analysis, energy-aware routing, mathematical programming/optimization, simulations.

I. INTRODUCTION

AD HOC wireless networks have a broad range of applicability: they can be used to interconnect PCs and laptops in a wireless LAN setting, provide the means of communication between hand-held devices, as well as enable the transmission of events that are observed by sensor network nodes back to collection points or data processing centers. The operational capabilities of such networks are fundamentally limited by the energy available at the nodes (radios) in the network. New and exciting developments in the area of renewable sources of energy [1]–[3] can be used to replenish the energy of individual nodes without the need to tether them to an electrical outlet. However, energy management is still very important in such networks since replenishment rates are typically small, and, therefore, the available energy is still a bottleneck in being able to successfully transmit packets through the network. In fact, the introduction of renewable energy sources poses new problems in the energy management of these ad hoc networks. Among other possible techniques for energy conservation, energy-aware routing

is aimed at choosing the most energy-efficient route to forward the packets, at the cost of computational overhead. In this paper, we present an admission control/routing framework in which we formulate and solve the problem of energy-aware routing with energy replenishment.

Energy-aware routing has received significant attention over the past few years [4]–[9]. In [5] and [8], algorithms have been presented to optimize the lifetime of the network. These algorithms can be viewed as different attempts to combine the key elements of two basic routing approaches: minimum energy (ME) routing, which uses the least energy, and max-min routing that selects the route with the maximum bottleneck residual node energy. It is shown through simulations in [5] that the algorithm empirically achieves a good competitive ratio. The definition of competitive ratio will be given later. In [9], the authors describe a way to incorporate a simple measure of a node's residual energy into the node's cost function in solving the problem of routing multicast circuits in an energy-limited wireless network. The authors realize the potential of developing alternative cost functions and make no claim of optimality. In [10] and [11], it is shown that shortest path routing with a cost metric that is an exponential function in residual energy is optimal in a competitive ratio sense. The main contribution in these works is to show that there is an analogy between the energy-aware routing problem and the routing of permanent virtual circuits (PVCs) as in [12], and that the mapping from per-link resources to per-node resources does not change the nature of the problem.

Our work and [10] both use competitive analysis to solve problems in energy-aware routing. What distinguishes our work from [10] is the following. First, from a theoretical point of view, our work differs from [10] significantly. In routing PVCs in ATM networks [12] or routing with nonrenewable energy sources [10], [11], the resources used are never recovered. In our case, the resources are allowed to be replenished by per-node processes. This model eventually leads to a system of energy queues. As a result, the dynamics in our system are more complicated and it is more difficult to show the competitive result. Second, our algorithm for the general case can be applied to a hybrid network where nodes with and without renewable energy sources are both present. If there are only nodes with no renewable energy sources, our algorithm reduces to that of [10]. Third, we proposed a different approach to reduce routing overhead. Lastly, we consider incremental deployment of nodes and present an algorithm to combine our E-WME metric and the on-demand routing framework. Also presented in this work is a proof of lower bound for the competitive ratio, which shows

Manuscript received December 1, 2005; revised July 10, 2006; approved by IEEE/ACM TRANSACTIONS ON NETWORKING Editor A. Kumar.

L. Lin and N. B. Shroff are with the Center for Wireless Systems and Applications (CWSA), School of Electrical and Computer Engineering, Purdue University, West Lafayette, IN 47906 USA (e-mail: llin@purdue.edu; shroff@ecn.purdue.edu).

R. Srikant is with the Department of Electrical and Computer Engineering and the Coordinated Science Laboratory, University of Illinois at Urbana-Champaign, Urbana, IL 61801 USA (e-mail: rsrikant@uiuc.edu).

Digital Object Identifier 10.1109/TNET.2007.896173

that our online algorithm is asymptotically optimal. These aspects are not discussed in [10].

The intellectual merit of our work lies in the development of:

- a mathematical framework that takes into account practical realities such as energy replenishment, mobility, and erroneous routing information;
- associated analytical techniques to provide an understanding of the performance benefits that can be achieved through energy-aware routing;
- distributed and scalable routing solutions that can be tailored to a variety of network topologies, traffic and mobility patterns.

Our energy model only assumes that each node in the network knows its own short-term energy replenishment schedule. This will be explained in detail in the next section. The energy flow into each node can be, for example, at different rates, or according to different on-off processes. The model also captures heterogeneous energy sources (different replenishment rates, battery sizes, etc.) in the network, and our algorithm can in fact adapt to the heterogeneity to do admission control and routing in an energy-opportunistic way. This algorithm is developed by making connections to routing of permanent virtual circuits (PVC) and switched virtual circuits (SVC) in the asynchronous transfer mode (ATM) literature. This is an online algorithm that can be easily implemented in a distributed fashion. By “online,” we mean the algorithm does not know future packet routing requests at decision time. In contrast, an offline algorithm knows the arrival times and packet sizes of all the packet routing requests, including those in the future. We show that our algorithm asymptotically achieves the best achievable performance of any online algorithm.

The rest of this paper is organized as follows. In Section II, we formulate the problem of energy-aware routing with energy replenishment, and present our network and energy model. In Sections III and IV, we present our algorithm and briefly discuss its implications. In Section V, we discuss our main result on the competitive ratio of our algorithm. We further discuss routing with incremental deployment in Section VI. Numerical results are provided in Section VII. A threshold-based scheme to reduce routing overhead is presented in Section VIII, and the integration of our algorithm into a DSR-like on-demand routing framework is discussed in Section IX. Concluding remarks are presented in Section X.

II. PROBLEM FORMULATION

A wireless multihop network is described by a directed graph $G(V, E)$, where V is the set of vertices representing the sensor nodes, and E is the set of edges representing the communication links between them. Packets are sent in a multihop fashion: a path from source to destination consists of one or multiple edges.

A 2-tuple (t_{nm}, r_{nm}) is associated with each edge $(n, m) \in E$, where t_{nm} is the transmission energy requirement for node n and r_{nm} is the reception energy requirement for node m . More precisely, if a data packet of length l is sent directly from node n to node m , an amount of energy equal to lt_{nm} will be subtracted from the residual energy of node n , and lr_{nm} will be subtracted

from the residual energy of node m . For simplicity, we assume that the size of a control packet is negligible compared to the size of a data packet. In Section VIII, we consider the impact of routing overhead and develop a scheme to reduce it.

We define the unit energy requirement of node n on path R as

$$e_n(R) = r_{n''(R)n} + t_{nn'(R)}, \quad \forall n \in R$$

where nodes $n''(R)$ and $n'(R)$ are the upstream and downstream neighbors of node n in path R , respectively. For convenience, when n is a source node, we let $r_{n''(R)n} = 0$, and when n is a destination node, we let $t_{nn'(R)} = 0$.

Often, it is assumed that $r_{nm} = 0$. Clearly, this is a special case of our model. However, studies on short-range communication with low radiation power show that the transmission and reception energy costs are often the same [13]. We can incorporate this in our model by letting $t_{nm} = r_{nm}$. Alternatively, in [4], the reception energy cost is captured by adding a constant to the link cost at each hop. This is a special case of our model with $r_{nm} = \text{constant}$.

We consider a discrete-time system in which each sensor node begins with a fully charged battery that has a capacity of u_n . At the end of each time slot τ , $P_n(\tau)$ is the residual energy at node n . Each node falls in one of the two categories depending on whether a renewable energy source is attached to it. We use V_r to denote the set of nodes with energy replenishment, and V_p to denote the set of nodes with no energy replenishment.

At the beginning of time slot τ , node $n \in V_r$ receives the energy accumulated due to replenishment in the previous time slot, represented by $\gamma(\tau - 1)$. At all times, the maximum energy at node n is not allowed to exceed u_n .

Data packet routing requests arrive to the network sequentially, the j th of which can be described as

$$\beta(j) = (S(j), D(j), l(j), T^s(j), \rho(j)) \quad (1)$$

where $S(j)$ is the source node of the j th packet routing request, $D(j)$ is the destination, $l(j)$ is the packet length, $T^s(j)$ is the arrival time of the request, and finally $\rho(j)$ is the revenue gained by routing this packet through the network. A request can be accepted only if there is at least one feasible path (that is, each node n along the path must have at least $l(j)e_n(R(j))$ amount of residual energy) in the system when the request arrives. If the routing request is accepted and $R(j)$ is the route used to accommodate the request, then $l(j)e_n(R(j))$ will be the amount of energy expenditure at node n , if $n \in R(j)$. We also assume that the reduction of energy is instantaneous for all the nodes along the path since the time-scale of energy replenishment is usually much larger than the time-scale of packet forwarding. In other words, we assume the delay due to packet transmission, queueing, etc., is negligible compared to the time it takes to replenish the energy consumption of transmitting/receiving one packet.

For any node n in V_r , the energy model can, therefore, be summarized by the following equation:

$$P_n(\tau) = \min(P_n(\tau - 1) + \gamma_n(\tau - 1), u_n) - I(a_n(j))l(j)e_n(R(j)), \quad n \in V_r$$

where $I(\cdot)$ is the indicator function and $a_n(j)$ is the event that $\beta(j)$ is accepted at τ , and $n \in R(j)$.

It is assumed that each node has an accurate estimate of its own short-term energy replenishment schedule. More precisely, at time-slot τ , node n knows $\gamma_n(\tau), \gamma_n(\tau + 1), \dots, \gamma_n(\hat{\tau}_n)$, where $\hat{\tau}_n$ is the earliest time the battery at node n would be fully recharged if no request were accepted at or after time τ . It is worth noting that the $\hat{\tau}_n$ here is dependent on the residual energy of node n at the arrival time of a request. In practice, this type of short-term prediction can be easily implemented.

We also assume that $\hat{\tau}_n$ is finite for $n \in V_r$. More specifically, we denote $T < \infty$ as an upper bound on the time it takes to fully charge the empty battery at any given node $n \in V_r$.

For any node n in V_p , since $\gamma(\tau) \equiv 0$, it is evident that the corresponding energy model can be written as

$$P_n(\tau) = P_n(\tau - 1) - I(a_n(j))l(j)e_n(R(j)), \quad n \in V_p.$$

Our goal is to maximize the total *revenue* over some finite horizon $[0, t]$

$$J_t := \sum_{j:j \leq k(t)} \rho(j)I(a(j)) \quad (2)$$

where $a(j)$ is the event that $\beta(j)$ is accepted, and $k(t)$ is the index of the last arrival in the time horizon, or, equivalently, $k(t)$ is the total number of arrivals in the time interval $[0, t]$.

We briefly comment on the choice of the revenue of the j th packet, $\rho(j)$, in the above formulation.

- If $\rho(j) \equiv 1$, then J_t is simply the total throughput in $[0, t]$.
- If different packets have different priorities, then this can be reflected in the above formulation by choosing different values of $\rho(\cdot)$ for different packets. A larger value of ρ would then indicate a packet of high priority.
- Since the work of Gupta and Kumar [14], a new metric (bit-meters/s) that combines throughput as well as the distance traversed by a bit has become popular. This can also be incorporated in our model by simply choosing $\rho(j)$ to be proportional to the distance between $S(j)$ and $D(j)$.

III. ALGORITHM FOR THE CASE OF CONSTANT REPLENISHMENT RATE

To succinctly highlight the main attributes of our solution, in this section, we describe our algorithm for the case when the rate of energy replenishment is constant (in time) at each node (although different nodes can have different replenishment rates). We also assume $V_p = \phi$ in this section, i.e., all nodes have nonzero energy replenishment rate. The solution to the more general case will be presented in the next section.

The basic idea of our algorithm is to assign a cost to each node, which is an exponential function in its residual energy and then use shortest-path routing with respect to this metric. To account for the timing relationship between the energy consumption and replenishment, we also need to measure the impact of previously accepted requests. To this end, we define the power depletion index $\lambda_n(j)$ of node n as

$$\lambda_n(j) = \frac{u_n - P'_n(j)}{u_n} \quad (3)$$

where $P'_n(j)$ is the energy at node n right before considering request j . We will show in Sections IV and V that the appropriate cost metric C_n associated with each node is given by

$$C_n(j, R) = \frac{u_n}{\gamma_n \log \mu} \left(\mu^{\lambda_n(j)} - 1 \right) l(j) e_n(R(j)) \quad (4)$$

where we recall that R is a path from source to destination, u_n is the battery capacity of node n , γ_n is the rate of energy replenishment, $\lambda_n(j)$ is the fraction of the maximum storable energy used up at node n when considering request j , $l(j)e_n(R(j))$ is the energy requirement for packet j of length $l(j)$, and μ is an appropriately chosen constant. Note that since we have assumed that $V_p = \phi$, $\gamma_n > 0, \forall n$. The hybrid case where some nodes may have no energy replenishment is addressed in Section IV.

As in a typical weighted shortest path routing, the cost associated with R when considering request $\beta(j)$ will, therefore, be calculated as

$$\text{Cost}_R(j) = \sum_{n \in R} C_n(j, R)$$

Our proposed algorithm can be described as follows.

E-WME (Energy-opportunistic Weighted Minimum Energy) Algorithm

For an incoming routing request j , check if the least-cost route R from $S(j)$ to $D(j)$ satisfies

$$\text{Cost}_R(j) \leq \rho(j). \quad (5)$$

If yes, accept the request and route the packet on the least-cost route.

Otherwise, reject the request.

Remark: The E-WME algorithm presented here¹ has provably good performance (because the cost function has been appropriately chosen) in the sense that it can secure a relatively large amount of revenue without any statistical information about the routing requests. This point will be further discussed when presenting our main result using competitive analysis in Section V. Moreover, this algorithm requires only local information at each node and can be easily incorporated in traditional distance-vector type of routing framework in a distributed fashion. For DSR-like mobile ad hoc on-demand routing protocols, we have also designed a distributed algorithm using our proposed metric to render them energy-aware. This will be further discussed in Section IX.

Before delving into our results from competitive analysis, it is more interesting to first look at the cost metric defined in (4), and to intuitively understand why this algorithm results in good performance.

- 1) Note that the metric in our E-WME algorithm for each node is an exponential function of the nodal residual energy, a linear function of the transmit and receive energies, and an inversely linear function of the replenishment rate.

¹More precisely with the cost function given in (6) and (7) from Section IV.

So, E-WME provides us with a clear guideline of how to balance the importance of residual energy (related to load balancing), the transmit and receive energies (related to resource thriftiness), and the quality of the replenishment.

- 2) If we assume that the nodes have the same energy replenishment process, e.g., all have the same constant rate of replenishment, the cost function (4) can be viewed as combining elements of the so-called ME and max-min approaches, similar to ideas in [10] and [11]. Suppose that there are two identical parallel links whose transmission and reception nodes have the same residual energies, then the one with the smaller link energy cost will be selected. Thus, it resembles the ME algorithm in this case. On the other hand, if there is a choice between two nodes whose link energy costs are the same, the algorithm will choose the node with the larger residual energy. This behavior is similar to the max-min approach.
- 3) In an environment where the rates of energy replenishment are heterogeneous, by using the cost function (4), the network automatically directs traffic to nodes with a faster energy renewal rate. Consider a set of nodes with similar residual energy as well as similar link transmission and reception energy requirements. Of these nodes, the ones which can replenish their batteries at a higher rate will advertise a cheaper cost. For instance, in a sensor network powered by solar cells, nodes receiving more sunlight will forward more data packets.
- 4) Note that even though u_n is in the numerator in (4), it does not imply that nodes with larger battery capacity are assigned a higher cost. The reason is that u_n is also embedded in the exponential cost metric since $\lambda_n(j) = 1 - \frac{P_n(j)}{u_n}$, where $P_n(j)$ is the residual energy at node n when considering request j .

IV. E-WME ALGORITHM FOR THE GENERAL CASE

In this section, we present the E-WME algorithm that allows a time-varying replenishment rate at each node. This algorithm can be applied to a hybrid network where nodes with and without renewable energy sources are both present.

For any node n with renewable energy source, i.e., $n \in V_r$, we begin by defining a set of parameters to describe the effect of previously accepted routing requests when considering the new request $\beta(j)$. More specifically, let $\Delta t_n(j)$ be the amount of time it takes for the incoming energy, accumulated from time slot $T^s(j-1)$, to equal $u_n - P_n(T^s(j-1))$. As mentioned in Section II, we then define

$$\hat{\tau}_n(j) = T^s(j-1) + \Delta t_n(j).$$

$\hat{\tau}_n(j)$ is the earliest time the battery at node n would be fully recharged if no request were accepted after request $(j-1)$. It can also be written as

$$\hat{\tau}_n(j) = \min_{\tau \geq T^s(j-1)} \left[\tau : \sum_{t=T^s(j-1)}^{\tau-1} \gamma_n(t) \geq (u_n - P_n(T^s(j-1))) \right].$$

To characterize the energy consumption due to previous packets, we define the new power depletion index $\lambda_n(j, \tau)$

$$\lambda_n(j, \tau) = \begin{cases} 0, & \tau \geq \hat{\tau}_n(j), \\ \lambda_n(k_\tau, \tau), & \tau < T^s(j-1), \\ \frac{u_n - P_n(T^s(j-1)) - \sum_{t=T^s(j-1)}^{\tau-1} \gamma_n(t)}{u_n}, & \text{otherwise} \end{cases}$$

where

$$k_\tau = \max\{j : T^s(j-1) \leq \tau\}.$$

In fact, $\lambda_n(j, \tau)$ is the fraction of the energy consumed due to $\{\beta(1), \beta(2), \dots, \beta(j-1)\}$ at node n , as measured at time τ . Note that new routing requests (with index greater than $(j-1)$) can arrive at or before time τ , but their energy consumption will *not* be included in the calculation of $\lambda_n(j, \tau)$. There are three cases in the above definition.

- $\tau \geq \hat{\tau}_n(j)$: By the definition of $\hat{\tau}_n(j)$, $\lambda_n(j, \tau)$ should be zero at or after time $\hat{\tau}_n(j)$.
- $T^s(j-1) \leq \tau < \hat{\tau}_n(j)$: In this case, part of the energy consumption has been restored.
- $\tau < T^s(j-1)$: In this case, the time-slot τ is before the arrival time of request $(j-1)$; hence, it is almost meaningless to talk about the energy consumption of $\{\beta(1), \beta(2), \dots, \beta(j-1)\}$ at time τ . For preciseness, we define $\lambda_n(j, \tau)$ in this case to be $\lambda_n(k_\tau, \tau)$, where k_τ is the largest request index j such that $\lambda_n(j, \tau)$ is “meaningful.”

Fig. 1 shows the amount of energy at node n assuming that no request is accepted after request $(j-1)$. In reality, it is conceivable that only a fraction of the last replenishment is received by the node, due to limited battery capacity. This is taken into account in the definition of $\lambda_n(j, \tau)$.

For any node n with no renewable energy source, i.e., $n \in V_p$, the power depletion index $\lambda_n(j)$ is defined as

$$\lambda_n(j) = 1 - \frac{P_n(T^s(j)-1)}{u_n}$$

where $P_n(T^s(j)-1)$ is the residual energy at node n when considering request j . As expected, $\lambda_n(j)$ is not a function of time-slot τ .

We now define our routing metric used on each node as

$$C_n(j, R) = \begin{cases} \sum_{\tau=T^s(j)}^{\hat{\tau}_n(j)-1} (\mu^{\lambda_n(j, \tau)} - 1) l(j) e_n(R(j)), & n \in V_r \\ T(\mu^{\lambda_n(j)} - 1) l(j) e_n(R(j)), & n \in V_p \end{cases} \quad (6)$$

where μ is a constant to be defined later, and R is a path from $S(j)$ to $D(j)$. We recall that $T < \infty$ as an upper bound on the time it takes to fully charge the empty battery at any given node $n \in V_r$. The main change in the definition of the node cost metric for $n \in V_r$ is to take into account the replenishment schedule in the immediate future. Again, the cost associated with R when considering request $\beta(j)$ will, therefore, be calculated as

$$\text{Cost}_R(j) = \sum_{n \in R} C_n(j, R). \quad (7)$$

The E-WME algorithm is the same as that given in Section III, with the cost function given by (6) and (7).

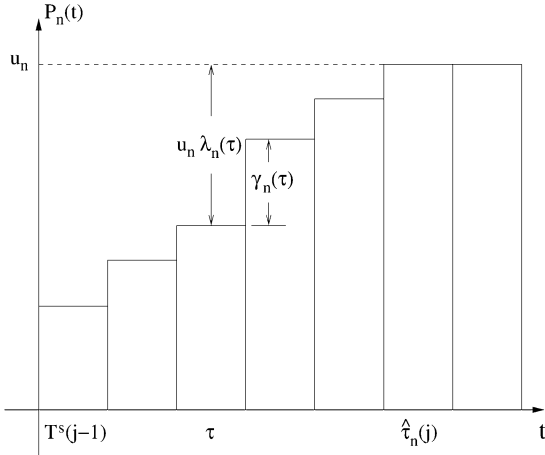


Fig. 1. Amount of energy at node n assuming that no request is accepted after request $(j - 1)$.

Remarks: It is worth noting that the admission control of routing requests is done in an energy-opportunistic fashion. Again, we turn to the example of a sensor network powered by solar cells. Let us assume that a request arrives at the network right after sunset. Recall our assumption that each node knows its short-term energy replenishment schedule. At this moment, each node knows that the energy replenishment rate will be much smaller for the several hours to come (in practice, this type of knowledge can be gained by evaluating the energy replenishment schedule over the past few days). The $\hat{\tau}_n(\cdot)$ calculated will then be relatively large, so the cost of routing the packet will be higher than that during the daytime. As compared to its daytime policy, the network is, thus, more conservative in accepting the request, which is precisely what the network should do in this particular scenario.

In a hybrid network where both kinds of nodes are present, we look at two nodes: one with energy replenishment and one without. Assuming that they both have the same residual energy and that the routing request takes the same communication costs from them, it is clear that the cost metric for the node with energy replenishment is smaller. Therefore, this node is more likely to be used than the one without energy replenishment.

In a network where there are only nodes with *no energy replenishment*, the modified E-WME algorithm reduces naturally to the algorithm presented in [10] and [11].

The cost function (6) is more complicated than that of the constant rate case (4). Nevertheless, it corresponds to a simple sum that can easily be computed at each node. Further, from an intuitive point of view, it still carries all the merits that we discussed in Section III.

Note that the cost function (4) for the case when the rate of energy replenishment is constant in time, i.e., $\gamma_n(\tau) \equiv \gamma_n$, can be approximated directly from the more general cost metric (6) when the node energy level is not full or close to full.

Consider the case where $\gamma_n \neq 0$. Since node n does not have a full battery upon the arrival of $\beta(j)$, and by the definition of $\hat{\tau}_n$, we have

$$u_n - P'_n(j) = (\hat{\tau}_n(j) - T^s(j))\gamma_n \quad (8)$$

and

$$\lambda_n(j, \tau) = \frac{u_n - P'_n(j) - (\tau - T^s(j))\gamma_n}{u_n} \quad (9)$$

where we recall that $P'_n(j)$ is the node energy right before considering request j . Putting (8) and (9) into (6) gives

$$\begin{aligned} C_n(j, R) &= \sum_{\tau=T^s(j)}^{\hat{\tau}_n(j)-1} l(j)e_n(R)(\mu^{\lambda_n(j, \tau)} - 1) \\ &= l(j)e_n(R) \left(\frac{\mu^{\frac{u_n - P'_n(j)}{u_n}} - 1}{1 - \mu^{-\frac{\gamma_n}{u_n}}} - \frac{u_n - P'_n(j)}{\gamma_n} \right). \end{aligned}$$

Note that $\mu^{-x} \approx 1 - x \log \mu$, when $0 \leq x \ll 1$. Using this approximation and (3), the cost function can be further simplified

$$C_n(j, R) \approx \frac{l(j)e_n(R)u_n}{\gamma_n \log \mu} (\mu^{\lambda_n(j)} - 1 - \lambda_n(j) \log \mu) \quad (10)$$

$$\approx \frac{l(j)e_n(R)u_n}{\gamma_n \log \mu} (\mu^{\lambda_n(j)} - 1). \quad (11)$$

The last approximation is true since $\lambda_n(j)$ is not close to zero and $\mu \gg 1$.

V. ASYMPTOTIC OPTIMALITY OF THE E-WME ALGORITHM

In this section, we show that the algorithms presented in Sections III and IV are online algorithms with asymptotically optimal competitive ratio. The competitive ratio is defined as

$$\sup_t \sup_{\substack{\text{all input} \\ \text{sequences in } [0, t]}} \frac{J_{t, \text{off}}}{J_{t, \text{on}}}$$

where $J_{t, \text{off}}$ is the performance achievable by any offline algorithm and $J_{t, \text{on}}$ is the performance of the given online algorithm, where the performance is defined in (2). A competitive ratio of r means that the performance of the online algorithm is at least $1/r$ that of any offline algorithm. In other words, a smaller competitive ratio means better performance.

We need the following two assumptions:

(A1)

$$1 \leq \frac{1}{L} \cdot \frac{\rho(j)}{l(j)e_n(R(j))T} \leq F, \quad \forall n \in R(j)$$

(A2)

$$l(j)e_n(R(j)) \leq \frac{u_n}{\log \mu}, \quad \forall n \in R(j)$$

where $R(j)$ is the path chosen by either the online or the offline algorithm to route $\beta(j)$, L is the maximum hop count allowed for any path, F is a constant chosen large enough to satisfy (A1), $T < \infty$, as defined before, is an upper bound on the time it takes to fully charge the empty battery at any given node $n \in V_r$, and $\mu = 2(\text{LFT} + 1)$. Assumption (A1) requires that the revenue from a packet scales with the amount of resource it requests. This is quite reasonable and certainly agrees with the definition of revenue as throughput or weighted throughput. Assumption (A2) guarantees that the energy claimed by a packet is not larger than a certain fraction of the total energy available at any single node. These assumptions are modifications of the

assumptions in [12] and take into account some crucial differences that we will discuss shortly.

Under assumptions (A1) and (A2), we have the following theorem. We prove this theorem for the E-WME algorithm in the general case using the cost function given by (6). A similar result can be proven using the cost function (4) for the special case with constant energy replenishment.

Theorem 1: (Asymptotic Optimality of the E-WME Algorithm): (A) The E-WME algorithm has a competitive ratio upper bounded by $O(\log(|V|))$, where $|V|$ is the number of nodes in the network.

(B) The competitive ratio of any online routing scheme is lower bounded by $\Omega(\log |V|)$.

From (A) and (B), our algorithm is asymptotically optimal.

Proof of Theorem 1: Please refer to the Appendix for the proof.

There are some similarities between SVC routing in the ATM literature [12] and our algorithm. However, our algorithm and proof have several crucial differences that we note below.

- 1) The replenishment of energy, or the release of resources in our case is a per-node activity, while it is a per-request activity in the routing SVC case.
- 2) The release of resources in our system is through a replenishment *process*, while the bandwidth occupied by a SVC is released at the end of the connection.
- 3) The SVC case is a typical loss system where there are multiple servers with no waiting room. In our system, each node can be viewed as an energy queue where the workload is the energy to replenish and the battery is the buffer. As a result, the limits of the summation over time in the cost metric equation (6) actually depend on the residual energy seen by an incoming request. In the SVC case, the summation over time depends only on the holding time of the incoming request itself.
- 4) The hybrid network model we have in this paper allows the co-existence of renewable resources and nonrenewable resources. Routing in this context has not been discussed previously in the related literature.

In the Appendix, we prove the above main result using techniques developed for the SVC case while taking into account the crucial differences between the two scenarios described above.

VI. ROUTING WITH INCREMENTAL DEPLOYMENT OF NODES

In a wireless sensor network, due to cost or technical considerations, deploying nodes adaptively and incrementally can result in significant improvement of network performance. For networks of sensor nodes without the support of energy replenishment (e.g., solar cells), incremental deployment of nodes, as an alternative way to replenish the in-network energy, is almost mandatory. Even for networks with nodal energy replenishment, the failure of the electronic devices at nodes, as well as the potentially unpredictable number of monitored events, makes it desirable to have the ability to deploy (possibly more powerful) nodes in an incremental fashion. Furthermore, using incremental deployment, it is easier to determine and deploy the right amount of sensors, e.g., to reach a certain degree of connectivity and coverage.

In the following discussion, we assume that the incremental deployment scheme consists of multiple phases. In each phase, one or more nodes are deployed. It is assumed that the online algorithm does not know the time at which each phase takes place until it actual happens.

An interesting question we attempt to answer here is how a good routing algorithm should behave with an incremental deployment of nodes. To approach this question, we first look at the performance of the ME routing and max-min routing in this context.

- Since the ME algorithm uses communication cost only, it may not be able to utilize the energy in some of the newly arrived nodes.
- The max-min algorithm strives to protect the nodes that are low in energy at the cost of more energy spent per packet. This kind of protection may not be necessary. Since there may be more nodes coming to help in the future, it may be desirable to have some nodes “die” to save on communication energy per packet.

As we can see from the above simple analysis, with incremental deployment of nodes, we again need to strike the right balance between these two approaches, among other things. In fact, in the following theorem, we show that the E-WME algorithm works well without any modification:

Theorem 2: (Asymptotic Optimality of the E-WME Algorithm in Networks With Incremental Deployment): (A) With unknown incremental deployments, the E-WME algorithm has a competitive ratio upper bounded by $O(\log(|V|))$, where $|V|$ is the maximum number of nodes in the network.

(B) With unknown incremental deployments, the competitive ratio of any online routing scheme is lower bounded by $\Omega(\log |V|)$.

From (A) and (B), our algorithm is asymptotically optimal.

Proof of Theorem 2: The detailed proof is omitted since it is a straightforward extension of the proof of Theorem 1. The intuition required to prove the logarithmic competitive ratio is to duplicate the network in time, and then use the result from the PVC case. Here, the same idea applies, except that the size of the network can now increase over time. Fortunately, this does not bring additional complexity to the proof. We provide the following online technical report for details [15]. In constructing the request sequence for the proof of the lower bound, we can assume the first request arrives only after all the nodes are deployed. The proof then follows that of part (B) of Theorem 1. ■

The above theorem shows that the E-WME algorithm can make good use of the available energy at any time to prolong network lifetime, without any knowledge of future node deployments. Intuitively, one would expect this result to be true because, as mentioned before, the incremental deployment of nodes can be viewed as a way to add to the in-network energy. By defining the cost metric as an exponential function in node residual energy, the E-WME routing is capable of closely adapting to these changes in network energy profile.

VII. NUMERICAL RESULTS

We now describe the results from our simulations. For our simulations, we randomly deploy 200 nodes on a 10×10 field. All nodes have an initial energy of 1. The energy consumption to

send a unit packet directly is Kd_{nm}^3 , where d_{nm} is the distance between two nodes and $K = 10^{-4}$ is a constant. Packet lengths are all 100. The constant K , as well as the packet lengths, is chosen in such a way that the energy required to transmit a packet is only a small fraction of the total available energy at a node. There is a link between node n and m if and only if a) the distance between them is less than or equal to the maximum transmission range of a node and b) node n has enough energy to transmit a packet from n to m directly. The maximum transmission range² is 3. Routing requests arrive to the network according to an i.i.d random process, and the average interarrival time is eight time slots. For each routing request, the source-destination pair is randomly selected among all the nodes (we have obtained similar results when packets are directed to a single node, such as data collection center in a sensor network. See Section VIII for such an example). Each node is responsible for generating its own packets as well as forwarding packets for others. Energy replenishment processes at the nodes are assumed to be *i.i.d.* random processes. The average replenishment rate of half of the nodes is 4 times that of the other half. At each time slot, the amount of energy that a node receives is uniformly distributed over intervals $[0, 4\hat{\gamma}]$ or $[0, \hat{\gamma}]$, where $\hat{\gamma} = 1.875 \times 10^{-5}$.

Even though our algorithm attempts to maximize the revenue of the network, to illustrate that the algorithm also has good performance under other metrics, we also use the oft-used notion of lifetime to compare our algorithm with other algorithms. Specifically, we say that a *partition* has occurred for a node pair if there is no path between the nodes with sufficient energy to route a packet. The above definition leaves the definition of network lifetime “open.” Lifetime could then be defined as the time that it takes for a certain fraction of the node pairs to experience partition. We believe a good definition of network lifetime is strongly application dependent. Some applications may require that all nodes stay connected at any given time, as in the traditional ad hoc computer networks. In that case, the throughput until the first node down time will be a good candidate for the network lifetime. In the case where nodes are densely deployed, losing connectivity at a few nodes may not pose great danger to the health of the network. To take into the many possible definitions of lifetime, we plot the end-to-end throughput against the number of node pairs that have experienced partition. For example, a point (500, 5000) would mean that 5000 packets were delivered between the randomly chosen source-destination pairs by the time 500 packets were dropped by the network because there was not sufficient energy to transmit the packets. Of course, since we allow energy replenishment, a partitioned node-pair could regain its connectivity later on.

In our simulations, we do not allow rejection of packets. Note that this, in fact, handicaps the E-WME algorithm since the optimality of our algorithm has been established assuming admission control. However, since most prior algorithms that we compare E-WME to do not use admission control, we decided not to use admission control for E-WME, but only use the E-WME

²The selection of maximum transmission range by itself is an interesting problem. Here, we just choose a value so that any two nodes are initially connected to each other in a multihop fashion.

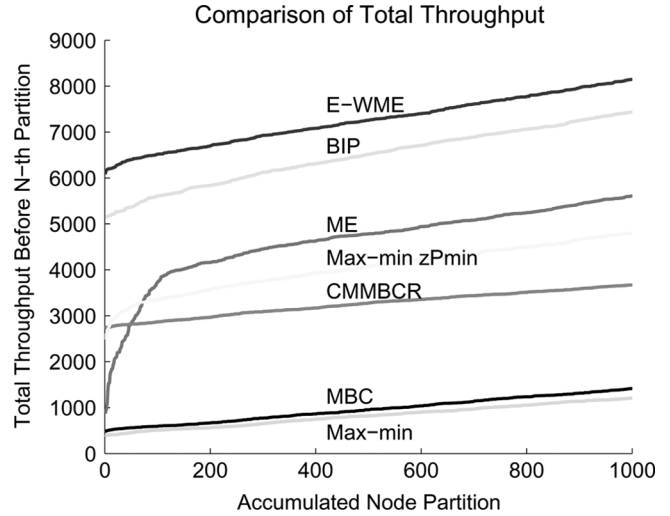


Fig. 2. Throughput comparison of E-WME to other schemes.

cost metric for shortest path routing to obtain a fair comparison with other algorithms.

Fig. 2 shows the throughput comparison between our E-WME algorithm and other routing algorithms in the literature. These algorithms can be put into three categories.

- Basic approaches include ME routing and max-min routing [13] (see Section I for a brief description of these two algorithms).
- Approaches based on dynamic weighted shortest path include broadcast incremental power (BIP) [9], maximum battery capacity (MBC) [7], and E-WME. For BIP, we vary parameter β in the suggested range $[0.5, 2]$ [9] and the result reported in Fig. 2 is the case when the throughput peaks with $\beta = 1.0$. Similarly, for MBC, we report the case with the quadratic model [7].
- Other approaches include max-min battery capacity routing (CMMBCR) [8] and max-min zP_{\min} routing [5]. The reported result for max-min zP_{\min} routing is the case when the maximum throughput is observed with the parameter $z = 2.0$.

It can be seen that E-WME always has better throughput than the other routing algorithms.³ The two main reasons are that E-WME is optimal in the sense of minimizing the competitive ratio, and that it strikes the right balance between saving communication cost and distributing the load.

Fig. 3 depicts the node energy distribution after 4200 successful end-to-end packet deliveries. This corresponds approximately to the time-instance at which the first node partition takes place in E-WME (see Fig. 2) (To avoid overcrowding the figure, we have left out the results from other schemes in the literature, since they can be viewed as different ways to combine max-min and ME). It is clear that the network with the ME or the max-min algorithm has many more nodes with low energy levels (the “crosses” correspond to nodes with less than 5% of their battery capacity, while “circles” correspond to nodes with greater than 5% of their battery capacity). The reason for the

³In fact, the improvement in using E-WME will even be larger if replenishment rates chosen are higher.

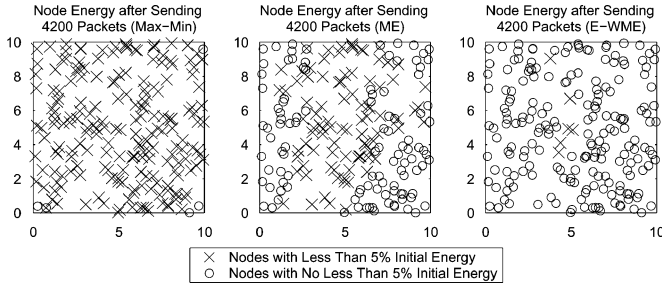


Fig. 3. Node energy distribution after sending 4200 packets.

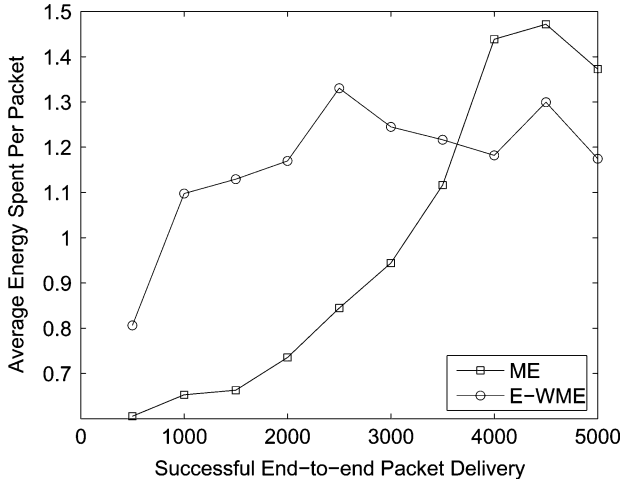


Fig. 4. Comparison of energy spent per packet between E-WME and the greedy approach (ME).

poor performance of the ME algorithm is its failure to load-balance between the nodes. The reason for the poor performance of the max-min algorithm is its failure to consider transmit and receive energies, which leads to routes with only a few hops and very large average energy expenditure per packet.

The ME routing is a greedy approach in terms of saving energy on each routing request. Compared to E-WME, such a myopic scheme can end up costing more in the long run. Fig. 4 shows the energy spent per packet (averaged over every 500 packets and normalized to the mean energy in the ME case) for E-WME and ME routing. The average energy per packet starts at a relatively low level for the ME routing. Without load balancing, the residual energy runs out faster at the critical nodes, e.g., the nodes near the center of the network, which leads to possible disconnections in the network. Hence, as more requests are routed, the average energy cost quickly increases, and eventually exceeds the average energy cost for the E-WME case. The latter, on the other hand, remains relatively steady over time. Although the average energy spent per packet is not our optimization goal, this figure does offer some explanation for why the E-WME algorithm outperforms greedy approaches such as the ME routing.

VIII. REDUCING ROUTING OVERHEAD

The proposed algorithm relies on instantaneous nodal information, so that changes in the energy level at each node have

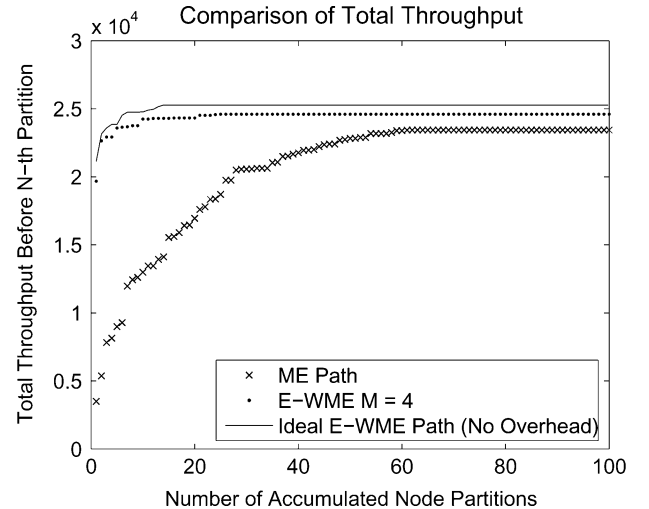


Fig. 5. Throughput comparison of ME routing and E-WME with different amounts of overhead.

to be instantaneously communicated to other nodes. In practice, this load balancing need not be carried out frequently. Our approach is as follows: routing updates are only initiated when the residual energy at a node passes some preset threshold. Intuitively, thresholds should be more finely tuned in nodes that are closer to energy depletion (so that these nodes can be avoided, if possible). Towards this end, we define a set of thresholds

$$T(i) = \log_{\mu} \frac{M}{i} \quad i = 1, 2, \dots, M.$$

After forwarding a packet, each node will check its fractional residual energy. If one or more thresholds is crossed, the node will then initiate an update.

This threshold-based scheme chooses the right moment to initiate updating. It is clear that an error term will appear in the cost metric since we are not using the most up-to-date node energy information. However, it can be easily shown that, as long as no threshold has been passed since the last update, the error in the per-node cost is upper bounded by $C\mu/M$, where C is a constant with respect to node energy. A set of equally spaced thresholds, on the other hand, will have a much larger error when the node residual energy is low. We provide the following online technical report for details [15].

Our routing algorithm can, therefore, adapt to different traffic patterns. A heavily loaded network does more updating. In a network where different types of low-duty cycle traffic patterns are possible, this routing algorithm self tunes accordingly. This can result in order of magnitude reduction in routing overhead, and incur only minimal degradation in performance.

Simulation results in Fig. 5 show that a four-threshold scheme has performance close to that of the ideal algorithm. (In the ideal case updating is done upon every change in nodal energy and the energy for exchanging updates is totally omitted). It is assumed in this set of simulations that the energy at each node is nonrenewable. For each routing request, the source node is randomly chosen and the destination is a common data collection gateway at the center of the field.

When nodes are mobile, the routing overhead can be further reduced by using an on-demand routing scheme. We will discuss this in the following section.

IX. ON-DEMAND ROUTING

When ad hoc network nodes are highly mobile, a proactive distance-vector implementation could lead to a large amount of overhead. In a mobile environment, on-demand routing protocols, e.g., dynamic source routing (DSR) [16], have the potential of reducing routing overhead, since there is no need to constantly update the routing tables. Ideally, routing should be tailored for different degrees of mobility. Proactive routing should be used in a low mobility environment, while on-demand routing should be used in a high mobility environment. Given our proposed dynamic routing framework, an interesting question is the following: Can we design a distributed algorithm to integrate E-WME into an on-demand routing framework?

The difficulty lies primarily in the route discovery process. Here, we would like to use the E-WME routing metric, and at the same time incur only a minimum amount of routing overhead. We propose the following approach to translate the E-WME cost metric linearly to waiting time, and forward only the best metric based on ideas in [5].

The algorithm for the route discovery process is given as follows. For simplicity of presentation, we assume that the intermediate nodes do not know a path to the destination. Let M_n be the E-WME metric associated with the best path (currently known to node n) from the source to node n , and M_{packet} be associated with a route request packet, representing the E-WME metric of the best path discovered so far. Let δ be an appropriately chosen small positive constant.

Energy-Aware Route Discovery Algorithm

- 1) Each node n calculates the E-WME cost metric C_{mn} on each of its *incoming* links from local communication. M_n is initialized to be ∞ for all nodes.
- 2) The source node S initiates route discovery by broadcasting a route request packet with source identification S , destination identification D , a unique request packet identification i , cost metric $M_{\text{packet}} = 0$, and the time-stamp T_0 .
- 3) For any other node n
 - a) upon receiving a route request packet from node m , update M_n by

$$M_n = \min(M_n, C_{mn} + M_{\text{packet}}).$$

- b) If $M_n = C_{mn} + M_{\text{packet}}$, compute the delay T_w as

$$T_w = \delta \times M_n$$

and set the timer to expire at time $(T_0 + T_w)$. Cancel any timer that was set to expire after $(T_0 + T_w)$, and is associated with the route discovery initiated by node S with the same request id.

- c) Upon expiration of the timer, if node n is not the destination, it propagates the routing request by setting $M_{\text{packet}} = M_n$, appending its own ID to the source route list in the packet, and broadcasting this request packet to all its neighbors. Otherwise (node n is the destination D), it transmits a route reply packet back to the source by reversing the route. In both cases, node n ignores any further route request packet initiated by node S with the same request id.

Note that the cost function (6) is path-dependent: the same node can have different costs depending on its upstream and downstream neighbors in the path. In the route discovery process of DSR, when an intermediate node propagates the route request packet, there can be more than one possible next hop, since the path is not finalized yet. Because the E-WME metric dictates the delay at each node in the above algorithm, it is then impossible to have a single delay value for each node. To solve this problem, in our algorithm, we calculate the cost of a link (n, m) as follows:

$$C_{nm}(j) = \frac{t_{nm}}{e_n(j)} C_n(j, R) + \frac{r_{nm}}{e_m(j)} C_m(j, R)$$

where we recall that t_{nm} and r_{nm} are the transmission and reception energy requirement of a unit packet for node n and node m , respectively. Note that the link cost $C_{nm}(j)$ calculated this way is independent of the path that the link is in.

The following theorem shows the above algorithm finds the correct E-WME path with little communication overhead.

Theorem 3: (Validity of the Energy-Aware Route Discovery Algorithm): The energy-aware route discovery algorithm finds the shortest path with respect to the E-WME metric with no more than $|V|$ transmissions in total.

Proof of Theorem 3: For part 3c of the algorithm, it is clear that each node in the network transmits at most one route request packet for each round of the route discovery process. Therefore, no more than $|V|$ route request packets are transmitted in total.

To prove that the algorithm finds the correct shortest path, we show that each node knows the shortest path from source node S to itself when its timer expires (Note that all the “shortest” paths mentioned in this proof are with respect to the E-WME metric). Let h be the hop count of the shortest path from the source node S to node n . We prove this result by induction over h as follows.

- If $h = 1$, from part 2 in the algorithm, it is clear that node n gets the shortest path from source node S to itself when its timer expires.
- Let us assume that any node with $h = k$ gets the shortest path from source node S to itself when its timer expires. For any node n with $h = k + 1$, the shortest path R_{Sn} from S to n consists of the short path R_{Sm} from S to a node m and the link (m, n) , where node m is a neighbor of node n . Since R_{Sm} is a path with k hops, node m sends the correct routing update to node n when the timer of node m expires. Since R_{Sn} is the “shortest” path, the delay calculated for

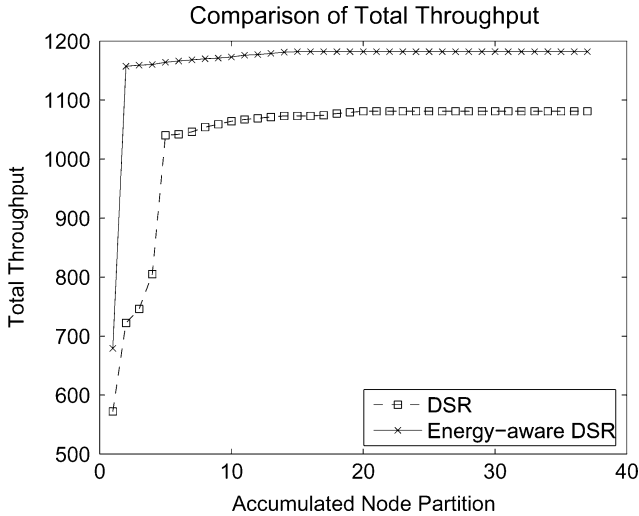


Fig. 6. Throughput comparison of energy-aware DSR and original DSR.

this path is the smallest. This has two implications: on the one hand, no timer of node n can expire before this timer, which implies the update from node m is not ignored; on the other hand, the update sent out when this timer expires carries the path R_{Sn} as well as the correct E-WME metric.

In the above theorem, the delay due to queueing and MAC contention, etc., is ignored. By choosing a large enough δ , we can ensure that the algorithm is still correct in the presence of such delay [5]. Using the above approach, we can reduce the overhead at the cost of a larger delay in route discovery. Meanwhile, other features of on-demand routing, e.g., detecting a change in network topology, time to keep routes in cache, etc., are not affected.

We have implemented the above energy-aware route discovery algorithm using the *ns-2* simulator [17]. In our simulation, we use the 802.11 MAC layer implemented in *ns-2*. There are 50 nodes randomly deployed in the sensor field. Their mobility is captured by the Random Way Point model with an average moving speed of 5.0 *m/s* and a pause time of 100 s. In Fig. 6, we show the performance comparison of two versions of DSR, one with the energy-aware route discovery mechanism and one without. (We have carried out extensive simulations with different node speeds and/or different traffic patterns. What is reported in Fig. 6 is typical in our simulations). It can be seen from the figure that the energy-aware DSR has better throughput performance. We assume in these simulations uniform transmission and reception power because the underlying MAC layer assumes symmetric connectivity. Otherwise the gain would be more significant. Nevertheless, the point we are trying to make here is that the idea of delay-based route discovery has provably bounded overhead, and it works in an actual on-demand routing framework.

X. CONCLUSION

In this work, we address the problem of energy-aware routing with distributed energy replenishment. We formulate

the problem as an integrated admission control and routing framework by appealing to ideas from PVC/SVC routing in the ATM literature. The energy model in this framework allows vastly different energy sources in heterogeneous environments. We have shown that our E-WME algorithm has an asymptotically optimal competitive ratio, which suggests that, in practice, this algorithm can lead to significant improvements in the performance of the network. The algorithm is easy to implement: it requires local short-term energy replenishment information and assumes no knowledge about the statistical information on the packet arrivals. The algorithm can be seamlessly integrated with distance-vector-like proactive routing protocols, and with minor modifications, can also be integrated with on-demand routing protocols. A threshold-based scheme is also introduced to reduce routing overhead while incurring minimum performance degradation.

The following are possible directions for future work. The strength of the competitive analysis lies in the fact that no statistical information on packet arrivals is assumed. This, however, can lead to conservative results since the focus is in the worst case. In multihop networks, some information about the packet arrival pattern may be known in advance, or through adaptive learning. Taking advantage of such knowledge, i.e., routing with a certain amount of known statistical information, may help develop algorithms for these scenarios.

Using the E-WME algorithm, successive packets of the same flow can get routed along different paths. This may have negative impact on upper layer protocols. The interaction between multipath routing and the transport/application layers is a very important problem, and needs further investigation.

In addition to taking energy considerations into account, our routing decisions should also take into account different channel conditions, especially in a wireless environment. The goal will be to develop optimal opportunistic routing algorithms that favor good channel conditions in order to minimize packet retransmissions and, thus, avoid unnecessary wastage of battery resources.

APPENDIX

Proof of Theorem 1: (A) We outline the proof as follows. We first establish the relationship between J_{on} , the secured revenue of the online algorithm, and the residual energy in the network [please refer to Inequality (18)]. We then show that $(J_{off} - J_{on})$, the additional revenue gained by the offline algorithm is upper-bounded by a function of the residual energy [please refer to Inequality (19)]. It follows that the ratio of J_{off} to J_{on} is upper-bounded by a logarithmic function in the number of nodes in the network.

Throughout the proof, for notational convenience, let

$$R_r(j) = R(j) \cap V_r, \quad \text{and} \quad R_p(j) = R(j) \cap V_p$$

denote the sets of renewable and nonrenewable nodes used to accommodate request j , respectively.

We begin by proving the following useful results. First, we consider a node $n \in V_r$. Let \mathcal{A} be the set of requests accepted by the E-WME algorithm, and k be the index of the last request.

Given a node $n \in V_r$, a time slot τ , and any function $f_n(\cdot)$, we have

$$\begin{aligned} & \sum_{\substack{j \in \mathcal{A}: n \in R_r(j), \\ T^s(j) \leq \tau < \hat{\tau}_n(j+1)}} \{f_n(\lambda_n(j+1, \tau)) - f_n(\lambda_n(j, \tau))\} \\ &= \sum_{j=1}^k \{f_n(\lambda_n(j+1, \tau)) - f_n(\lambda_n(j, \tau))\}. \quad (12) \end{aligned}$$

We consider the following three cases whose union corresponds to the complement of the index set $\mathcal{U}_{n,\tau} = \{j \in \mathcal{A} : n \in R(j), T^s(j) \leq \tau < \hat{\tau}_n(j+1)\}, n \in V_r$.

- 1) If $j \notin \mathcal{A}$, or $j \in \mathcal{A}$ but $n \notin R(j)$, the load created by the first j requests is the same as the first $(j-1)$ ones, since the j th request has no impact on the energy of node n at time τ . It follows that $\lambda_n(j+1, \tau) = \lambda_n(j, \tau)$.
- 2) If $\tau \geq \hat{\tau}_n(j+1)$, then the energy consumed by the first j requests is fully recharged at time τ . It follows that $\lambda_n(j+1, \tau) = \lambda_n(j, \tau) = 0$.
- 3) If $\tau < T^s(j)$, then $\lambda_n(j+1, \tau) = \lambda_n(j, \tau)$, by the definition of $\lambda_n(j, \tau)$.

In these three cases, $f_n(\lambda_n(j+1, \tau)) = f_n(\lambda_n(j, \tau))$ always holds since $\lambda_n(j+1, \tau) = \lambda_n(j, \tau)$. In other words, for any index j satisfying any of the above three conditions, or equivalently $j \notin \mathcal{U}_{n,\tau}$, the corresponding term in the right hand side of (12) gives no contribution to the sum. Hence, we can calculate the summation according to a smaller set of indices, as indicated by the left hand side of (12).

Similarly, for any node $n \in V_p$, we have the following result:

$$\begin{aligned} & \sum_{j \in \mathcal{A}: n \in R_p(j)} \{f_n(\lambda_n(j+1)) - f_n(\lambda_n(j))\} \\ &= \sum_{j=1}^k \{f_n(\lambda_n(j+1)) - f_n(\lambda_n(j))\}. \quad (13) \end{aligned}$$

We are now ready to derive the relationship between the residual energy and the revenue secured by the online algorithm.

For any $j \in \mathcal{A}$, $n \in R_r(j)$, and τ satisfying $T^s(j) \leq \tau < \hat{\tau}_n(j)$,

$$\begin{aligned} Y_n(j, \tau) &:= u_n \left\{ \left(\mu^{\lambda_n(j+1, \tau)} - 1 \right) - \left(\mu^{\lambda_n(j, \tau)} - 1 \right) \right\} \\ &= u_n \left(\mu^{\lambda_n(j, \tau) + \frac{l(j)e_n(R(j))}{u_n}} - \mu^{\lambda_n(j, \tau)} \right) \\ &= u_n \mu^{\lambda_n(j, \tau)} \left(\mu^{\frac{l(j)e_n(R(j))}{u_n}} - 1 \right) \\ &= u_n \mu^{\lambda_n(j, \tau)} \left(2^{\frac{l(j)e_n(R(j))}{u_n}} \log \mu - 1 \right). \end{aligned}$$

Since $2^x - 1 \leq x$ for $x \in [0, 1]$ and using (A2), we have

$$\begin{aligned} Y_n(j, \tau) &\leq u_n \mu^{\lambda_n(j, \tau)} \frac{l(j)e_n(R(j))}{u_n} \log \mu \\ &\leq (\mu^{\lambda_n(j, \tau)} - 1) l(j)e_n(R(j)) \log \mu \\ &\quad + l(j)e_n(R(j)) \log \mu. \quad (14) \end{aligned}$$

Similarly, for any $j \in \mathcal{A}$, $n \in R_r(j)$, and τ satisfying $\hat{\tau}_n(j) \leq \tau < \hat{\tau}_n(j+1)$, the following equation holds:

$$\begin{aligned} Y_n(j, \tau) &:= u_n \{ (\mu^{\lambda_n(j+1, \tau)} - 1) - (\mu^{\lambda_n(j, \tau)} - 1) \} \\ &= u_n (\mu^{\lambda_n(j+1, \tau)} - 1) \\ &\leq u_n \lambda_n(j+1, \tau) \log \mu \\ &\leq l(j)e_n(R(j)) \log \mu. \quad (15) \end{aligned}$$

The last inequality is true since $u_n \lambda_n(j+1, \tau)$ in this case represents the impact of the energy consumed by request j , as measured at time τ . Summing $Y_n(j, \tau)$ over $n \in V_r$, τ , and j , by the virtue of (12), (14), and (15), we have

$$\begin{aligned} & \sum_{n \in V_r} \sum_{\tau} u_n (\mu^{\lambda_n(k+1, \tau)} - 1) \\ &= \sum_{n \in V_r} \sum_{\tau} \sum_{j=1}^k Y_n(j, \tau) \\ &= \sum_{n \in V_r} \sum_{\tau} \sum_{\substack{j \in \mathcal{A}: n \in R_r(j), \\ T^s(j) \leq \tau < \hat{\tau}_n(j+1)}} Y_n(j, \tau) \\ &= \sum_{j \in \mathcal{A}} \sum_{n \in R_r(j)} \sum_{\tau=T^s(j)}^{\hat{\tau}_n(j+1)-1} Y_n(j, \tau) \\ &\leq \sum_{j \in \mathcal{A}} \sum_{n \in R_r(j)} \left\{ \sum_{\tau=T^s(j)}^{\hat{\tau}_n(j)-1} (\mu^{\lambda_n(j, \tau)} - 1) l(j)e_n(R(j)) \log \mu \right. \\ &\quad \left. + \sum_{\tau=T^s(j)}^{\hat{\tau}_n(j+1)-1} l(j)e_n(R(j)) \log \mu \right\}. \quad (16) \end{aligned}$$

For the nodes without renewable energy sources, from (13), a simpler result [10], [11] holds in the following form:

$$\begin{aligned} & \sum_{n \in V_p} T u_n (\mu^{\lambda_n(k+1)} - 1) \\ &\leq \sum_{j \in \mathcal{A}} \sum_{n \in R_p(j)} T \left\{ (\mu^{\lambda_n(j)} - 1) l(j)e_n(R(j)) \log \mu \right. \\ &\quad \left. + l(j)e_n(R(j)) \log \mu \right\}. \quad (17) \end{aligned}$$

Combining (16) and (17), and using the fact that $\beta(j)$ is accepted and part of assumption (A1), it follows that:

$$\begin{aligned} & \sum_{n \in V_r} \sum_{\tau} u_n (\mu^{\lambda_n(k+1, \tau)} - 1) \\ &\quad + \sum_{n \in V_p} T u_n (\mu^{\lambda_n(k+1)} - 1) \\ &\leq \sum_{j \in \mathcal{A}} \log \mu \left\{ \text{Cost}_R(j) + LT \max_{n \in R(j)} [l(j)e_n(R(j))] \right\} \\ &\leq \sum_{j \in \mathcal{A}} \log \mu \left\{ \rho(j) + LT \max_{n \in R(j)} [l(j)e_n(R(j))] \right\} \\ &\leq \sum_{j \in \mathcal{A}} \log \mu \{ \rho(j) + \rho(j) \} \\ &\leq \sum_{j \in \mathcal{A}} 2\rho(j) \log \mu. \quad (18) \end{aligned}$$

Next, we derive the relationship between the residual energy and the *additional* revenue secured by the offline algorithm.

Let \mathcal{Q} be the set of requests accepted by the offline algorithm and rejected by our online algorithm, and $R(j)$ be the path chosen by any given offline algorithm for $\beta(j)$, $j \in \mathcal{Q}$. Since $\beta(j)$ is rejected by the E-WME algorithm

$$\begin{aligned} \rho(j) &< \sum_{n \in R_r(j)} C_n(j, R) + \sum_{n \in R_p(j)} C_n(j, R) \\ &= \sum_{n \in R_r(j)} \sum_{\tau=T^s(j)}^{\hat{\tau}_n(j)-1} \left(\mu^{\lambda_n(j, \tau)} - 1 \right) l(j) e_n(R(j)) \\ &\quad + \sum_{n \in R_p(j)} T \left(\mu^{\lambda_n(j)} - 1 \right) l(j) e_n(R(j)) \\ &\leq \sum_{n \in R_r(j)} \sum_{\tau=T^s(j)}^{\hat{\tau}_n(j)-1} \left(\mu^{\lambda_n(k+1, \tau)} - 1 \right) l(j) e_n(R(j)) \\ &\quad + \sum_{n \in R_p(j)} T \left(\mu^{\lambda_n(k+1)} - 1 \right) l(j) e_n(R(j)). \end{aligned}$$

Summing over all $j \in \mathcal{Q}$ and exchanging the order of summation, we have

$$\begin{aligned} &\sum_{j \in \mathcal{Q}} \rho(j) \\ &\leq \sum_{j \in \mathcal{Q}} \left\{ \sum_{n \in R_r(j)} \sum_{\tau=T^s(j)}^{\hat{\tau}_n(j)-1} \left(\mu^{\lambda_n(k+1, \tau)} - 1 \right) l(j) e_n(R(j)) \right. \\ &\quad \left. + \sum_{n \in R_p(j)} T \left(\mu^{\lambda_n(k+1)} - 1 \right) l(j) e_n(R(j)) \right\} \\ &= \sum_{n \in V_r} \sum_{\tau} u_n \left(\mu^{\lambda_n(k+1, \tau)} - 1 \right) \\ &\quad \times \sum_{\substack{j \in \mathcal{Q}: n \in R_r(j), \\ T^s(j) \leq \tau < \hat{\tau}_n(j)}} \frac{l(j) e_n(R(j))}{u_n} \\ &\quad + \sum_{n \in V_p} T u_n \left(\mu^{\lambda_n(k+1)} - 1 \right) \sum_{j \in \mathcal{Q}: n \in R_p(j)} \frac{l(j) e_n(R(j))}{u_n} \\ &\leq \sum_{n \in V_r} \sum_{\tau} u_n \left(\mu^{\lambda_n(k+1, \tau)} - 1 \right) \\ &\quad + \sum_{n \in V_p} T u_n \left(\mu^{\lambda_n(k+1)} - 1 \right). \end{aligned} \quad (19)$$

The last step is true since

$$\sum_{\substack{j \in \mathcal{Q}: n \in R_r(j), \\ T^s(j) \leq \tau < \hat{\tau}_n(j)}} \frac{l(j) e_n(R(j))}{u_n} \leq 1, \quad \forall n \in V_r,$$

and

$$\sum_{j \in \mathcal{Q}: n \in R_p(j)} \frac{l(j) e_n(R(j))}{u_n} \leq 1, \quad \forall n \in V_p$$

i.e., the energy claimed by the offline algorithm from each node at each time slot cannot exceed the battery capacity of that node. Note that the condition $T^s(j) \leq \tau < \hat{\tau}_n(j)$ for $n \in V_r$ implies

that the energy consumption due to $\beta(j)$ has not been replenished yet in our energy model: therefore, $l(j) e_n(R(j))$ is part of the used energy for the offline algorithm.

Inequality (18) basically establishes the relationship between the secured revenue and the residual energy. Inequality (19) guarantees that the additional revenue gained by the offline algorithm is upper-bounded by a function of the residual energy. Denoting the set of all calls accepted by the offline algorithm by \mathcal{A}^* , we have

$$\begin{aligned} \frac{J_{\text{off}}}{J_{\text{on}}} &= \frac{\sum_{j \in \mathcal{Q}} \rho(j) + \sum_{j \in \mathcal{A}^* \setminus \mathcal{Q}} \rho(j)}{\sum_{j \in \mathcal{A}} \rho(j)} \\ &\leq \frac{\sum_{j \in \mathcal{Q}} \rho(j) + \sum_{j \in \mathcal{A}} \rho(j)}{\sum_{j \in \mathcal{A}} \rho(j)} \leq 1 + 2 \log \mu. \end{aligned}$$

Recall that $\mu = 2(\text{LFT} + 1)$, where L is the maximum hop count allowed for any path, F is a constant chosen large enough to satisfy (A1), T is the upper bound on the time it takes to fully charge an empty battery. Therefore, $(1 + 2 \log \mu) = O(\log |V|)$, since $L \leq |V|$.

It remains to be shown that our routing algorithm does not violate the energy constraint at each node. Again let \mathcal{A} be the set of requests accepted by our online algorithm. Suppose by way of contradiction that $\beta(j)$ is the first accepted request to violate energy capacity constraint at node n at its arrival time-slot τ . (Due to the replenishment, the first time slot such a violation can happen is the arrival time slot). Then

$$\lambda_n(j, \tau) > 1 - \frac{l(j) e_n(R(j))}{u_n}. \quad (20)$$

From the above inequality and (A2)

$$\begin{aligned} &\mu^{\lambda_n(j, \tau)} - 1 \\ &> \left(\mu^{1 - \frac{l(j) e_n(R(j))}{u_n}} - 1 \right) \\ &\geq \left(\mu^{1 - \frac{1}{\log \mu}} - 1 \right) \\ &= \frac{\mu}{2} - 1 = \text{LFT}. \end{aligned} \quad (21)$$

From (21)

$$\left(\mu^{\lambda_n(j, \tau)} - 1 \right) l(j) e_n(R(j)) > l(j) e_n(R(j)) \text{LFT} \geq \rho(j).$$

From the description of our algorithm, the above inequality shows that $\beta(j)$ could not have been accepted in the first place. The above argument works for nodes with or without renewable energy source. Therefore, our routing algorithm does not violate the energy constraint at each node.

(B) The proof of the lower bound follows the proof for the SVC case [18], where examples are shown to prove the lower bound of $\Omega(\log |V|)$ in circuit-switched networks. In these examples, capacity constraints are put on the links. However, it so happens that in the examples, every link (n, m) that can possibly have the maximum congestion connects to exactly one distinct node m . This property makes it straightforward to convert the examples into special cases of the energy-aware routing problems we study. In this case, the energy replenishment does not complicate the proof either.

For completeness, we include the proof as follows.

To show the lower bound, we construct a sequence of routing requests, and show that the total revenue secured by the online algorithm is upper bounded by the total revenue of the offline algorithm multiplied by $2/\log n$.

Consider a string of $(n + 1)$ nodes with uniform battery capacity, say 1. Denote the nodes by v_0, v_1, \dots, v_n . The transmission energy requirement $t_{k,k+1} = \alpha$, and the reception energy requirement $r_{k,k+1} = 0, k = 0, 1, 2, \dots, n - 1$. All batteries are initially full. All requests appear at the beginning, though sequentially. They come in $(\log n + 1)$ phases. In each phase $i, 0 \leq i \leq \log n$, there are 2^i groups of requests, $0 \leq j \leq 2^i - 1$. A request in phase i , group j has $v_{jn/2^i}$ as source node and $v_{(j+1)n/2^i}$ as the destination node. Each group of such requests consists of $1/\alpha$ identical packet routing requests, where each packet has unit length. Each request carries the same revenue α .

Note that the sequence of routing requests is designed such that the resource per unit revenue decreases exponentially fast, which means that accepting later requests is "exponentially" better. However, an online algorithm cannot wait for the last request since it does not know which request is the last one. Let c_i denote the total amount of energy used by the online algorithm in phase i . Since there are n nodes in the network whose energy can be used to transmit packets, it is evident that $\sum_{i=0}^{\log n} c_i \leq n$. At phase i , a unit of revenue corresponds to spending $n/2^i$ units of energy, since $n/2^i$ nodes are involved to accommodate one packet routing request. Let B_k be the total revenue secured by the online algorithm up to phase k . Then

$$B_k = \sum_{i=0}^k \frac{2^i}{n} c_i.$$

Note that offline algorithm can always accept only the requests in phase k and secure 2^k revenue and declare phase k to be the last phase. Therefore, the maximum revenue for an offline algorithm up to phase k is 2^k . We now consider the ratio of the online revenue to the offline revenue, namely $B_k/2^k$. To show the lower bound, it is enough to show that there exists some k such that this ratio is upper bounded by $2/\log n$. Consider the summation of the ratio from $k = 0$ to $\log n$

$$\begin{aligned} \sum_{k=0}^{\log n} \frac{B_k}{2^k} &= \sum_{k=0}^{\log n} \sum_{i=0}^k \frac{2^{i-k}}{n} c_i \\ &= \sum_{i=0}^{\log n} \sum_{k=i}^{\log n} \frac{2^{i-k}}{n} c_i < \sum_{i=0}^{\log n} \frac{2c_i}{n} \leq 2. \end{aligned}$$

Therefore, there exists some k such that $B_k/2^k \leq 2/\log n$. ■

REFERENCES

- [1] *Surface Wave Energy Harvesting*, DARPA, 2005 [Online]. Available: <http://www.darpa.mil/ato/programs/SWEH/DT.htm>
- [2] A. Kansal and M. B. Srivastava, "An environmental energy harvesting framework for sensor networks," in *Proc. Int. Symp. Low Power Electronics and Design*, 2003, pp. 481–486.
- [3] "Microstrain wins Navy contract for self powered wireless sensor networks," MicroStrain Press Release Dec. 2003 [Online]. Available: <http://www.microstrain.com/news/article-29.aspx>

- [4] L. Li and J. Halpern, "Minimum energy mobile wireless networks revisited," presented at the IEEE Int. Conf. Communications, Jan. 2001.
- [5] Q. Li, J. A. Aslam, and D. Rus, "Online power-aware routing in wireless ad-hoc networks," in *Proc. 7th Annu. Int. Conf. Mobile Computing and Networking*, 2001, pp. 97–107.
- [6] V. Rodoplu and T. H. Meng, "Minimum energy mobile wireless networks," *IEEE J. Sel. Areas Commun.*, vol. 17, no. 8, pp. 1333–1344, Aug. 1999.
- [7] S. Singh, M. Woo, and C. S. Raghavendra, "Power-aware routing in mobile ad hoc networks," *Mobile Comput. Netw.*, pp. 181–190, 1998.
- [8] C.-K. Toh, "Maximum battery life routing to support ubiquitous mobile computing in wireless ad hoc networks," *IEEE Commun. Mag.*, vol. 39, no. 6, pp. 138–147, Jun. 2001.
- [9] J. Wieselthier, G. Nguyen, and A. Ephremides, "Energy limited wireless networking with directional antennas: The case of session-based multicasting," presented at the IEEE INFOCOM, New York, 2002.
- [10] K. Kar, M. Kodialam, T. V. Lakshman, and L. Tassiulas, "Routing for network capacity maximization in energy-constrained ad-hoc networks," presented at the IEEE INFOCOM, San Francisco, CA, 2003.
- [11] L. Lin, N. B. Shroff, and R. Srikant, "A distributed power-aware routing algorithm with logarithmic competitive ratio for sensor networks," Tech. Rep., Purdue Univ., West Lafayette, IN, 2002 [Online]. Available: <http://yara.ecn.purdue.edu/shroff/PRF/Lin02.pdf>
- [12] S. A. Plotkin, "Competitive routing of virtual circuits in ATM networks," *IEEE J. Sel. Areas Commun.*, vol. 13, no. 6, pp. 1128–1136, Jun. 1995.
- [13] I. F. Akyildiz, W. Su, Y. Sankarasubramaniam, and E. Cyrci, "Wireless sensor networks: A survey," *Comput. Netw.*, vol. 38, no. 4, pp. 393–422, 2002.
- [14] P. Gupta and P. R. Kumar, "The capacity of wireless networks," *IEEE Trans. Inf. Theory*, vol. 46, no. 2, pp. 388–404, Mar. 2000.
- [15] L. Lin, N. B. Shroff, and R. Srikant, "Asymptotically optimal power-aware routing for multihop wireless networks with renewable energy sources," Tech. Rep., Purdue Univ., West Lafayette, IN, 2004 [Online]. Available: <http://web.ics.purdue.edu/llin/PRF/Lin04a.pdf>
- [16] D. B. Johnson and D. A. Maltz, "Dynamic source routing in ad hoc wireless networks," in *Mobile Computing*, Imielinski and E. Korth, Eds. Norwell, MA: Kluwer, 1996, vol. 353.
- [17] S. Bajaj, L. Breslau, D. Estrin, K. Fall, S. Floyd, P. Haldar, M. Handley, A. Helmy, J. Heidemann, P. Huang, S. Kumar, S. McCanne, R. Rejaie, P. Sharma, K. Varadhan, Y. Xu, H. Yu, and D. Zappala, "Improving simulation for network research," Tech. Rep. 99-702, 1999, USC/ISI.
- [18] B. Awerbuch, Y. Azar, and S. A. Plotkin, "Throughput-competitive on-line routing," in *Proc. IEEE Symp. Foundations of Computer Science*, 1993, pp. 32–40.



Longbi Lin (S'05) received the B.S. (with honors) degree from Tsinghua University, Beijing, China, in 2000, and the M.S. and Ph.D. degrees from the School of Electrical and Computer Engineering, Purdue University, West Lafayette, IN, in 2002 and 2006, respectively.

His research interests are resource allocation, optimization, routing, load balancing, network as a large system, energy-related issues and cross-layer design in wireless networks, and mobile ad hoc and sensor networks.



Ness B. Shroff (S'91–M'93–SM'01) received the Ph.D. degree from Columbia University, New York, NY, in 1994.

He has been with Purdue University, West Lafayette, IN, since 1994, and is currently a Professor of electrical and computer engineering at Purdue. His research interests span the areas of wireless and wireline communication networks. He is especially interested in fundamental problems in the design, performance, control, security, and pricing of these networks.

Dr. Shroff is an Editor for the IEEE/ACM TRANSACTIONS ON NETWORKING and the *Computer Networks Journal*, and Past Editor of the IEEE COMMUNICATIONS LETTERS. He was the Technical Program Co-Chair for IEEE INFOCOM'03, the Panel Co-Chair for ACM Mobicom'02, Program Co-Chair for the Symposium on High-Speed Networks, Globecom 2001, and Conference Chair for the 14th Annual IEEE Computer Communications Workshop. He was the Co-Organizer of the National Science Foundation (NSF) Workshop on Fundamental Research in Networking in April 2003. He received the IEEE INFOCOM 2006 Best Paper Award, the IEEE IWQoS 2006 Best Student Paper Award, the 2005 Best Paper of the Year Award for the *Journal of Communications and Networking*, the 2003 Best Paper of the Year Award for *Computer Networks*, and the NSF CAREER award in 1996. His INFOCOM 2005 paper was also selected as one of two runner-up papers for the Best Paper Award.



R. Srikant (S'90–M'91–SM'01–F'06) received the B.Tech. degree from the Indian Institute of Technology, Madras, in 1985, and the M.S. and Ph.D. degrees from the University of Illinois at Urbana-Champaign in 1988 and 1991, respectively, all in electrical engineering.

He was a Member of Technical Staff at AT&T Bell Laboratories from 1991 to 1995. He is currently with the University of Illinois, where he is a Professor in the Department of Electrical and Computer Engineering and a Research Professor in the Coordinated

Science Laboratory. His research interests include communication networks, stochastic processes, queueing theory, information theory, and game theory.

Dr. Srikant was an Associate Editor of *Automatica*, and is currently an Associate Editor of the IEEE/ACM TRANSACTIONS ON NETWORKING and the IEEE TRANSACTIONS ON AUTOMATIC CONTROL. He is also on the editorial boards of special issues of the IEEE JOURNAL ON SELECTED AREAS IN COMMUNICATIONS and IEEE TRANSACTIONS ON INFORMATION THEORY. He was the Chair of the 2002 IEEE Computer Communications Workshop in Santa Fe, NM, and will be a Program Co-Chair of IEEE INFOCOM 2007.